


Need a staging solution for your next outdoor event? We create hire experiences that are fast, affordable and professional for every customer

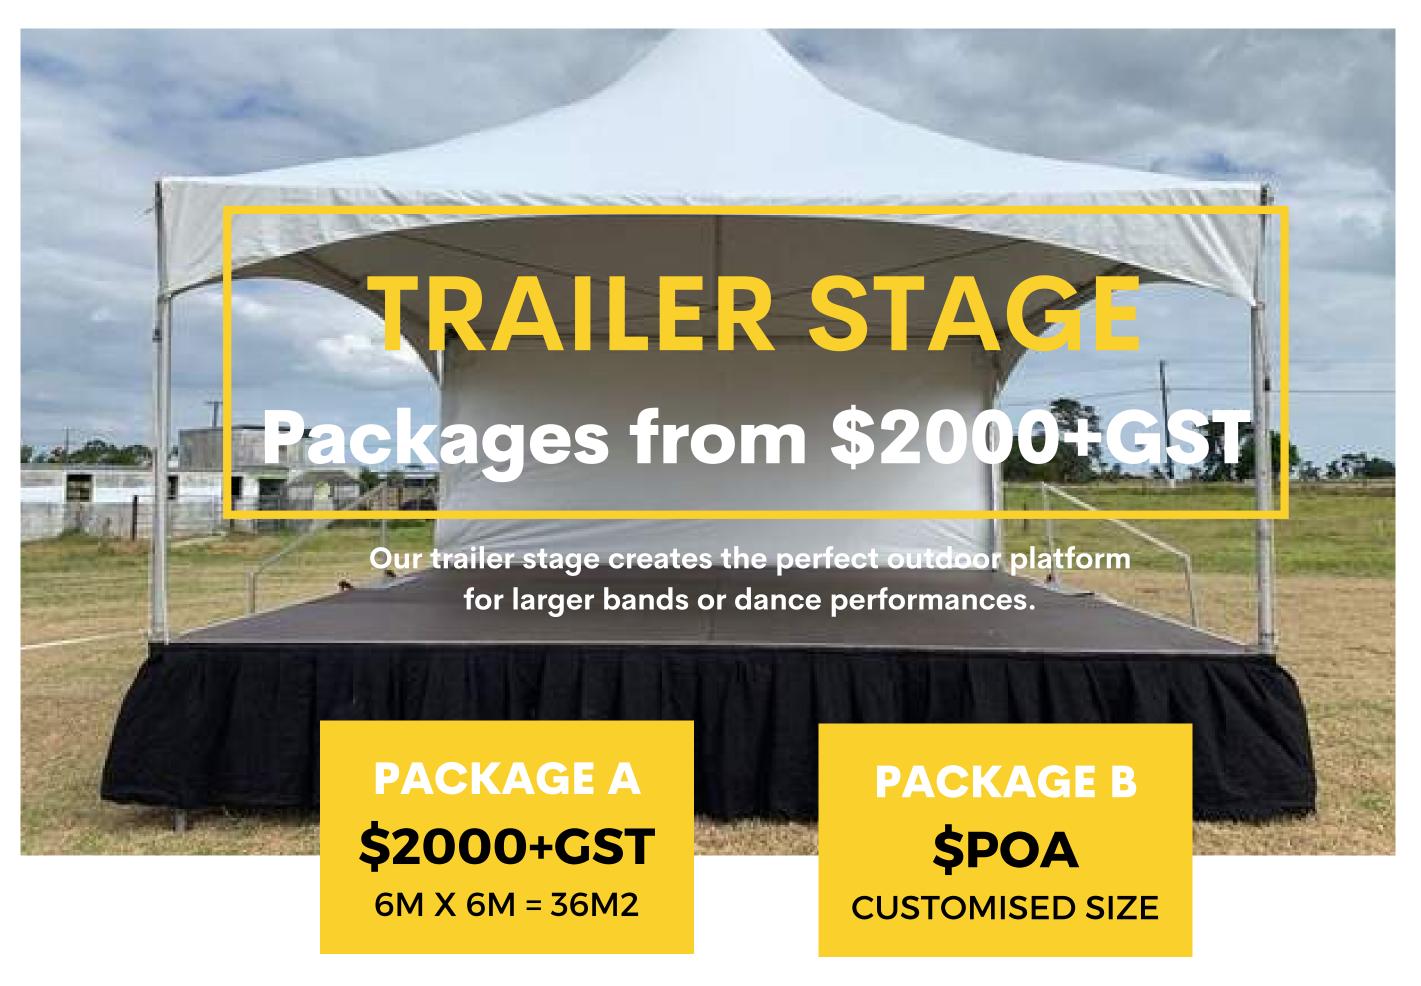

STAGE SPECIFICATIONS

- The trailer stage takes 2hrs to build, and 90 mins to packdown.
 Additional time will be required if adding production and/or backline.
- The site footprint required for setup is 15m length x 12m depth x 4m height as the trailer is towed by a truck into place.
- Adequate access to get the truck to its desired position must be suitable for a truck weighing upto 10T to access. A site map showing the access route is required for all setups. Should the truck get stuck, the cost to rescue it will be passed onto the client.

- The stage is reinforced steel overlayed with treated wooden stage panels. Loading capacity 750kg/m2.
- On completion of the build, the stage height is roughly 900mm -1200mm depending on site foundation, and comes complete with a black stage skirt and two sets of stairs with handrail.
- The trailer stage has the option to place a 6m x 6m springtop marquee on top, providing cover from sun/rain.
- The site must be flat under the wheelbase of the trailer.

- The surface of which the truck stage is built canot have a slope of more than 300mm tolerance from front to back side to side.
- Our trailer stage with marquee
 has been certified to handle wind
 gusts of up to 50kph. Should site
 conditions / weather forecast
 exceed gusts of 50kph, discussions
 will be held with the client preevent regarding safe solutions.
- Additional staging can be added to create a larger stage space.
 Please enquire for a price on application.
- Prices noted above are for Auckland delivery only, with additional transport charged for locations beyound.



Need a staging solution for your next outdoor event? We create hire experiences that are fast, affordable and professional for every customer

TRAILER STAGE SPECIFICATIONS

BUILD: 2 Hours

PACKDOWN: 90 Mins

CREW: 2 CREW

SITE REQUIRED: 15m x 12m x 4m
We need enough room to position trailer towed by small truck. Site needs to be as flat as possible, especially under trailer wheelbase.

STAGE DIMENSIONS: 6m x 6m x 900mm .Trailer drawbar is 1.15m and is positioned next to access stairs. Black poly stage skirt wraps all sides of stage.

STAGE LOAD: 750kg/m2

ACCESS: 2 Stair cases with handrails

MARQUEE: 6m x 6m Springtop. comes with three sides, dependant on wind.

""With a full road closure of Tamaki Drive for the Waterfront Half Marathon, we needed a staging solution that looked awesome and that could also be setup and removed in double quick time.

The mobile stage guys gave us guaranteed times and they did not let us down. Not only did the team execute with speed, but the stage helped lift our event and 4,000 runners loved rocking out to the band as they passed. Great value and already locked in for next year."

Rob Doherty, Race Director of Auckland Waterfront Half Marathon





